




The "Africa" 4-stroke range, born from monitoring and Yamaha's long experience, has been specially developed to meet the extreme conditions of use. Power and reliability are the hallmarks of this range of engines in a field where Yamaha is the reference brand.

F300BETX/FL300BETX

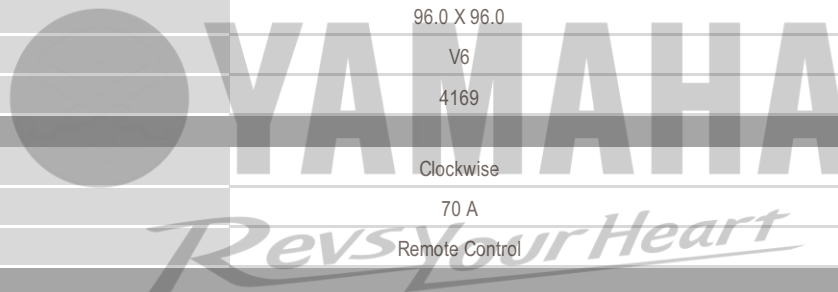

| TECHNICAL CHARACTERISTICS | F300BETX | FL300BETX |
|--|----------------------------|----------------------------|
| MOTOR | | |
| Engine Type | In-line 4 | In-line 4 |
| Ignition System | Electronic Ignition (TCI) | Electronic Ignition (TCI) |
| Reduction ratio | 10.3 :1 | 10.3 :1 |
| Start-up | Electric with Prime Start™ | Electric with Prime Start™ |
| Power system | Electronic Injection (EFI) | Electronic Injection (EFI) |
| Lubrication system | Unleaded | Unleaded |
| Fuel consumption (L/h-tr/min) | 96.6 L/h @5500 r/min | 96.6 L/h @5500 r/min |
| Fuel | Wet Sump | Wet Sump |
| Full throttle operating range (tr/min) | 5000-6000 | 5000-6000 |
| Max.Prop Shaft Horsepower (Kw) | 220.6 (300 hp) | 220.6 (300 hp) |
| Bore x Stroke (mm) | 96.0 X 96.0 | 96.0 X 96.0 |
| Architecture | V6 | L4 |
| Displacement (cc) | 4169 | 4169 |
| MORE | | |
| Propeller Rotation | Clockwise | Counter Clockwise |
| Alternator | 70 A | 70 A |
| Control | Remote Control | Remote Control |
| DIMENSIONS | | |
| Dry weight with propeller (kg) | 268 | 268 |
| Engine transom height (mm) | X : 643 (25.3 inch) | X : 643 (25.3 inch) |
| Oil capacity (L) | 6.3 L/ 6.0 L | 6.3 L/6.0 L |
| EQUIPMENTS | | |
| Service kit assy. | ✓ | ✓ |
| Remocon Control | ✓ | ✓ |
| Panel Switch | ✓ | ✓ |
| Ride, Guide Kit Twin | - | ✓ |
| Multi Display | ✓ | - |
| REGULAR PROPELLER (3 blades) | | |
| Material | STEEL | STEEL |
| Diameter | 15 1/4 | 15 1/4 |

Always wear a helmet, eye protection and protective proper clothing.
YAMAHANIGERIA encourages you to ride safely with responsible manners that comply with all laws while respecting the environment.

